

























Up-Rite Desk Mounted Sit/Stand Workstation Single Monitor

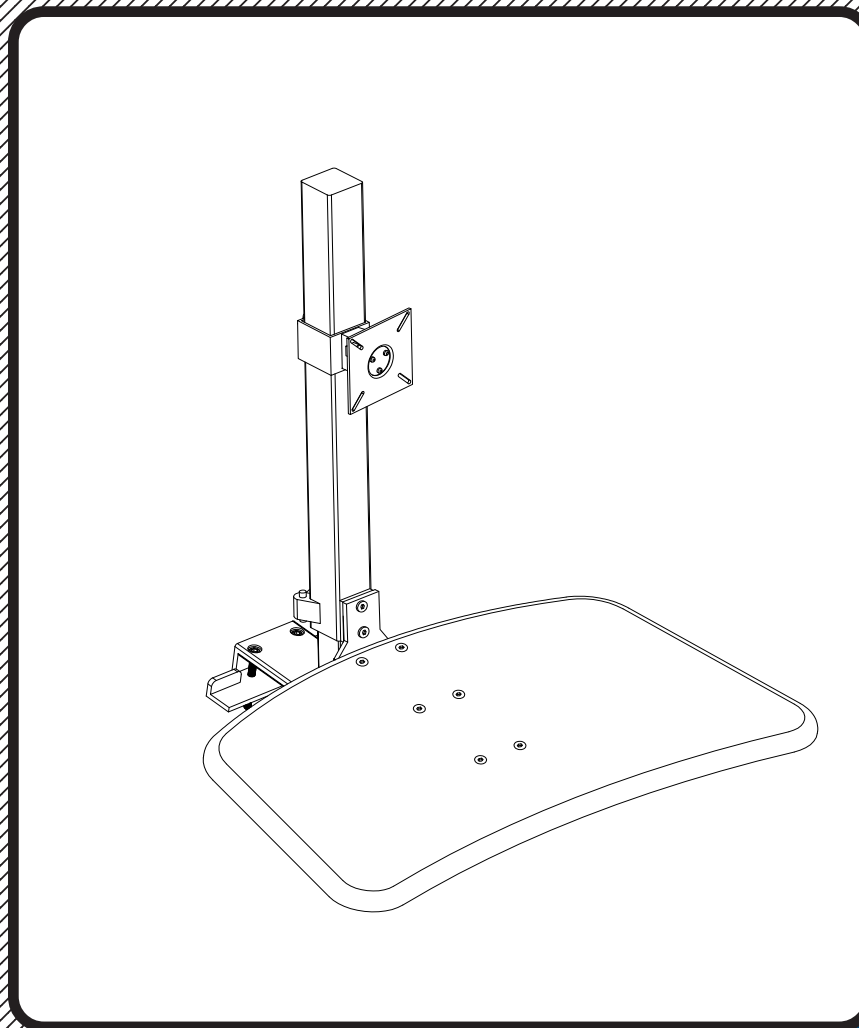

Assembly Instructions

91113

| Part | Drawing | Description | Qty | Part | Drawing | Description | Qty | | | | | | | | | | | | | | | | | | | | | | | | |
|------|--|------------------|------|---|---------|-------------|-----|---|--|---------------|------|---|--|--------------|------|---|--|-----------|------|---|--|---------------|------|---|--|---------------|------|---|--|---------------|------|
| P1 |  | Keyboard Top | 1 EA | <div style="border: 2px solid black; padding: 10px;"> <p style="text-align: center;">Hardware List</p> <table border="0"> <tr> <td>A</td> <td></td> <td>Screw M6*13mm</td> <td>8 EA</td> </tr> <tr> <td>B</td> <td></td> <td>Allen Wrench</td> <td>1 EA</td> </tr> <tr> <td>C</td> <td></td> <td>Wire Wrap</td> <td>1 EA</td> </tr> <tr> <td>D</td> <td></td> <td>Tension Plate</td> <td>2 EA</td> </tr> <tr> <td>E</td> <td></td> <td>Screw M8*70mm</td> <td>2 EA</td> </tr> <tr> <td>F</td> <td></td> <td>Screw M8*12mm</td> <td>2 EA</td> </tr> </table> </div> | | | | A |  | Screw M6*13mm | 8 EA | B |  | Allen Wrench | 1 EA | C |  | Wire Wrap | 1 EA | D |  | Tension Plate | 2 EA | E |  | Screw M8*70mm | 2 EA | F |  | Screw M8*12mm | 2 EA |
| A |  | Screw M6*13mm | 8 EA | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B |  | Allen Wrench | 1 EA | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C |  | Wire Wrap | 1 EA | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D |  | Tension Plate | 2 EA | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| E |  | Screw M8*70mm | 2 EA | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| F |  | Screw M8*12mm | 2 EA | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P2 |  | Support Post | 1 EA | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P3 |  | Keyboard Support | 1 EA | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P4 |  | Monitor Mount | 1 EA | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P5 |  | Mount Bar | 1 EA | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Assembly Instructions

READ THROUGH INSTRUCTIONS FROM BEGINNING TO END BEFORE STARTING TO ASSEMBLE UNIT.

- 1.) Identify and Separate all the parts to your new Workstation.
- 2.) Slide the Mount Bar (P5) under the clamp section of the Support Post (P2). Loosely attach using two Screws (F) and two Screws (E) as shown in illustration #1.

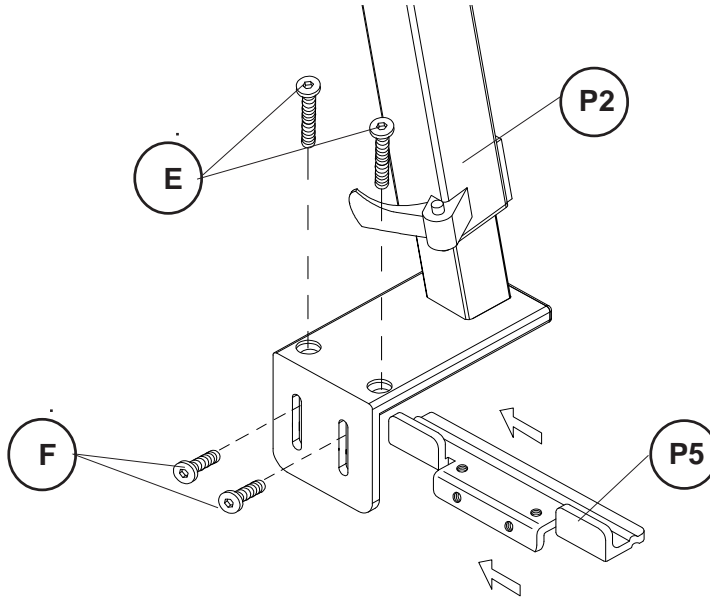


Illustration # 1

- 3.) Loosen the two Allen Recess Screws in the rear section of the Support Post's (P2) table clamp. Next, loosen the two Allen Recess Screws in the top section. Slide the Support Post (P2) onto the back of the table you will be using. Tighten the two top Screws (E) using Allen Wrench (C) until the Support Post is firmly in place. Tighten the two Screws (F) in the rear of the clamp to lock the unit in place. See illustration #2.

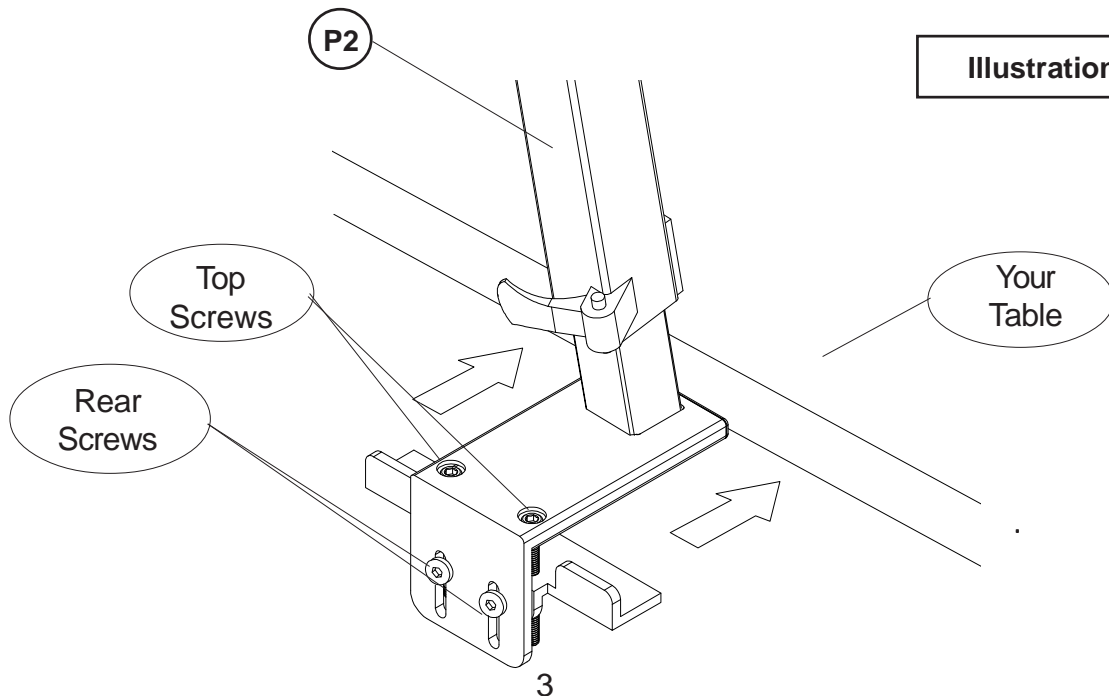


Illustration # 2

- 4.) Attach the Keyboard Support (P3) to the plate on the front of the Support Post (P2) using two Screws (A). Tighten Screws with Allen Wrench as shown in illustration #3.

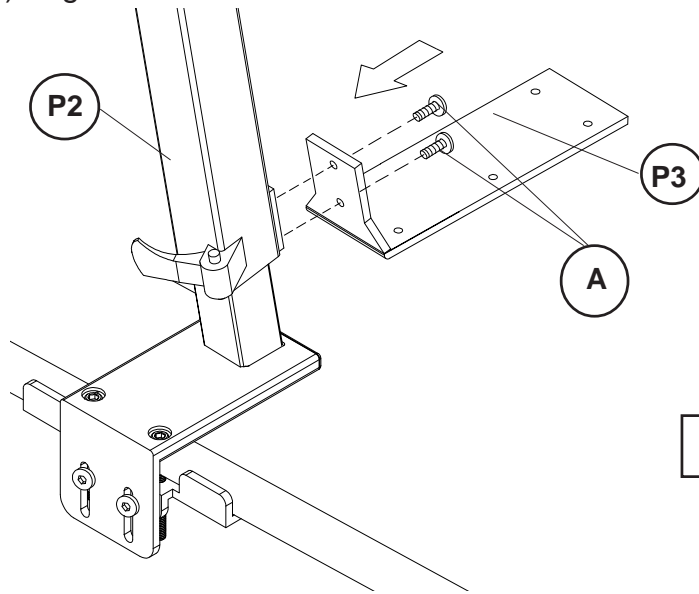


Illustration # 3

- 5.) Attach the Keyboard Top (P1) to the Keyboard Support using six Screws (A) as shown in illustration #4. Tighten Screws using Allen Wrench.

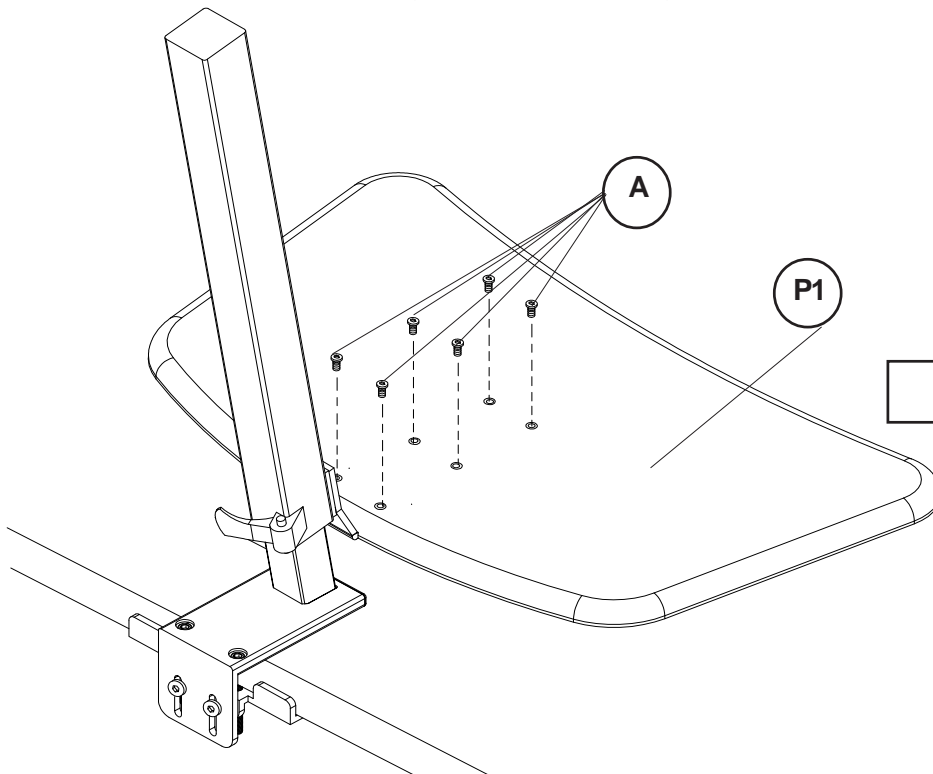


Illustration # 4

- 6.) Loosen the clamp lever on the Monitor Mount (P4) and insert two Tension Plates (D) on the sides. Slide the Monitor Mount down the vertical post of the Support Post (P3). Clamp the lever down to secure at your height setting. See illustration # 5.

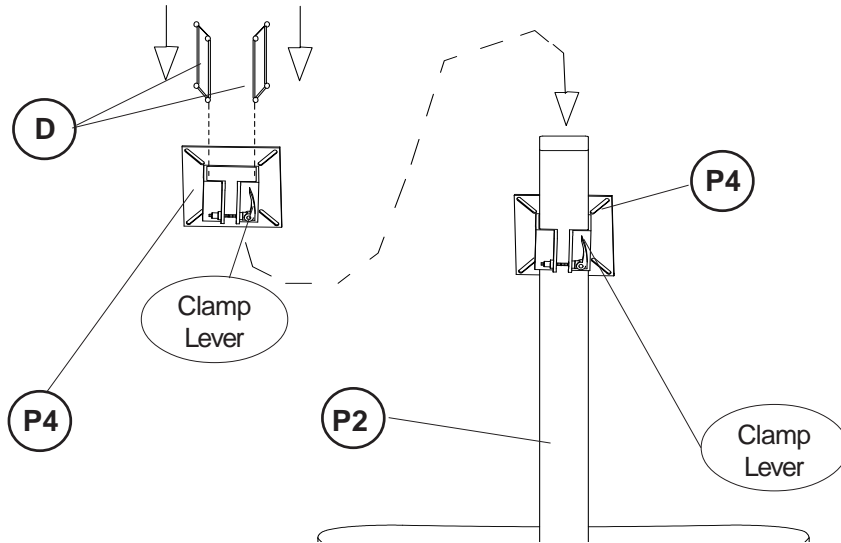


Illustration # 5

- 7.) Use Wire Wrap (D) to manage electrical cables after your equipment is installed.

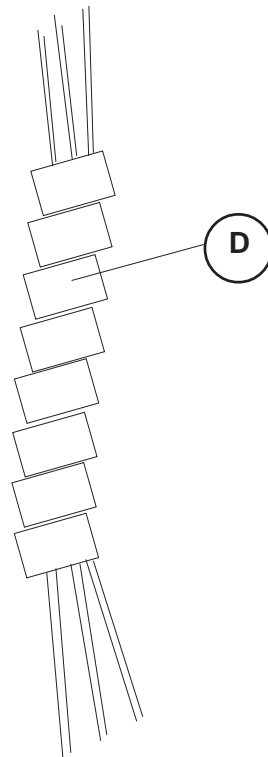


Illustration # 6