


Anchor Table Installation



You will need:

Not Included:

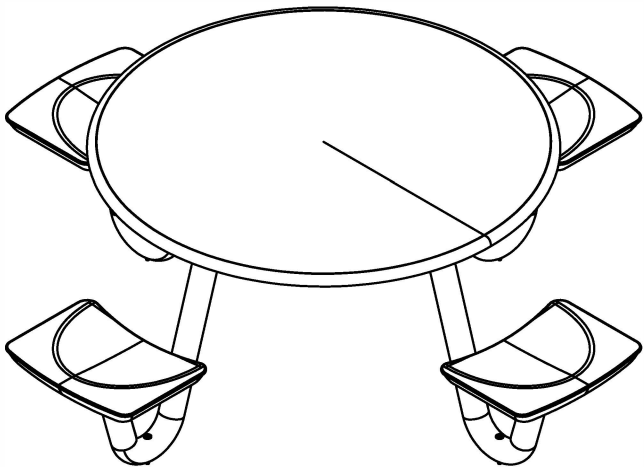


1x
Pencil
For Marking Floor




1x
Drill
With 3/8" Masonary Bit



1x
Screwdriver
With Tamper Resistant Torx Bit




4x / 6x / 8x
3/8" - 16 x 4"
Tamper Resistant Torx Screw




4x / 6x / 8x
3/8" Flat Washer
.406" ID .875" OD

Included:




32x / 48x / 64x
5/16" Washer
.344" ID .75" OD



32x / 48x / 64x
5/16" Split Lock Washer
.322" ID .583" OD




16x / 24x / 32x
5/16" - 18 x 3/4"
Security Torx Bolts




16x / 24x / 32x
5/16" - 18 x 1"
Security Torx Bolts



4x / 6x / 8x
Plastic Seat




4x / 6x / 8x
Metal Table Leg



1x
Table Top
Alternative Size & Shapes Available


Anchor Table Installation

1.

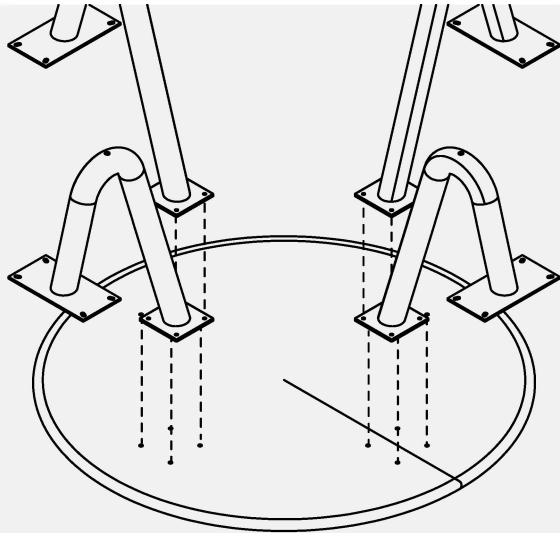


Align legs with table top inserts
Check fitment and make any necessary adjustments.

2.

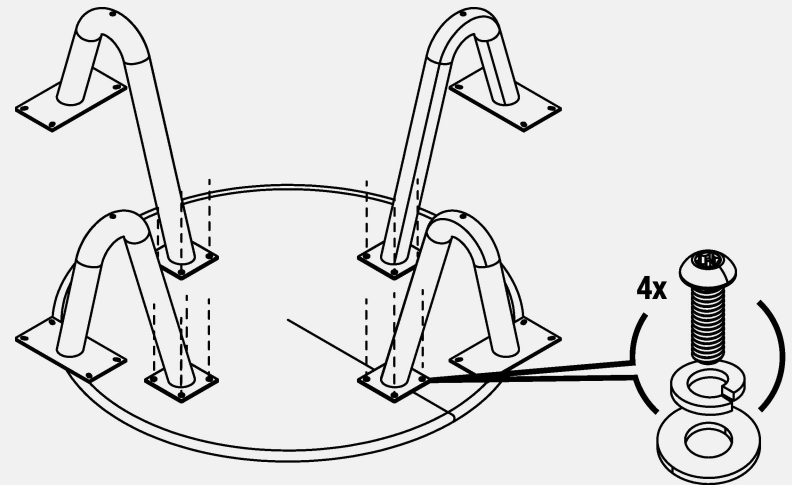


Insert and tighten each table top screw 3-5 turns past finger tight.

3.

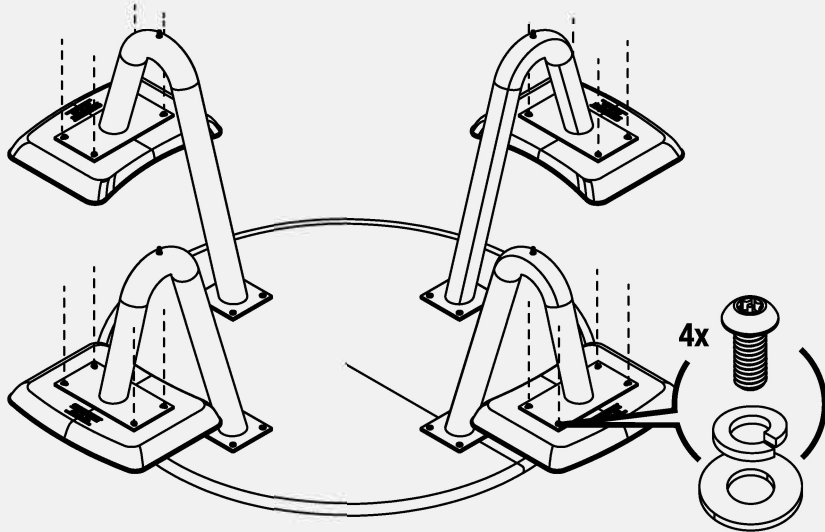

Align seat with leg plate
Insert lock washer and tighten each seat screw 3-5 turns past finger tight.

4.

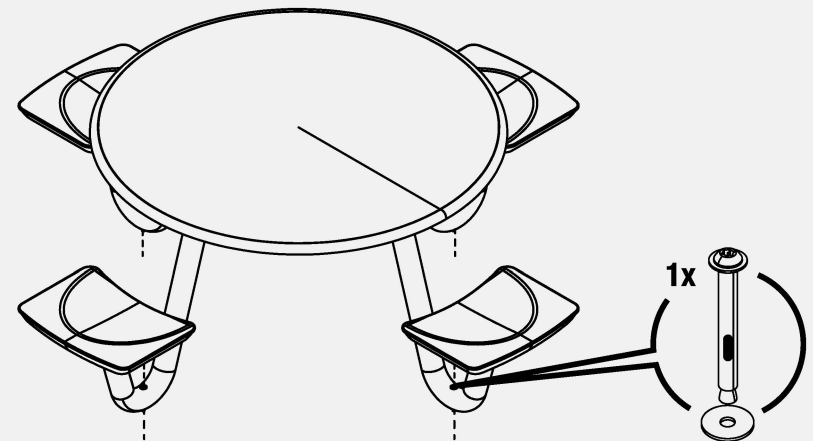

Turn over table. Position table in desired location. Using a pen or pencil, mark the leg mounting location onto the floor. Drill holes in the locations where you marked the center of the floor mount hole. Hole depth should be 2.0" deep MINIMUM. Install concrete anchor and bolt to table to floor.