





# Submittal Sheet

## Model: 30HS01XX (Surface Mount) Vantage Stainless Steel Diaper Changing Station

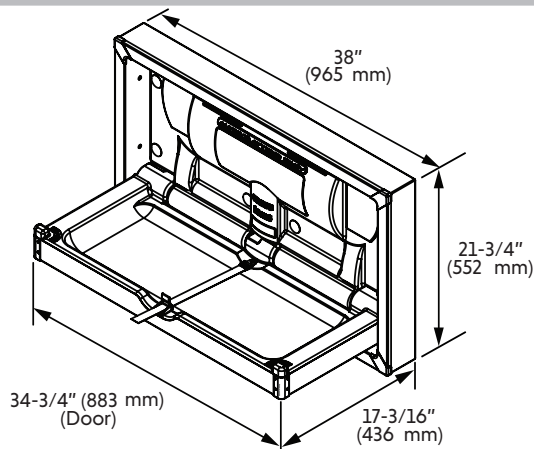

### Recommended Blocking Surface Mount

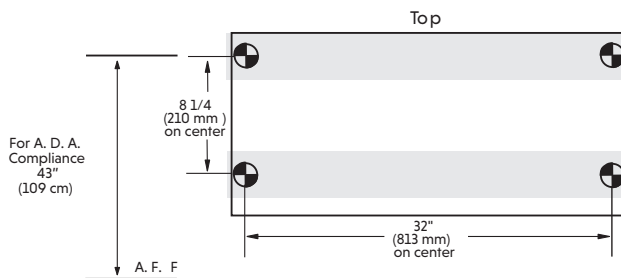

### Color Options

- ☐ Brushed Stainless
  - 30HS0106
- ☐ Matte Black
  - 30HS0109

### Installation Information

- Unit projects 4" (100mm) when surface mounted.
- Open unit projects from wall 17-3/16" (436 mm) when surface mounted.

- Polyethylene body with stainless steel exterior
- Easy to clean, high density polyethylene which is naturally bacteria resistant, beneath 304 brushed stainless steel encasement.
- Standard with molded-in dual liner dispensers.
- Each liner dispenser holds approximately 50 of the 05XX0107 or 05XX0207 liners.
- Smooth nylon belt with Thermoplastic Polyurethane coating. Easy to sanitize and adjustable with one hand.
- Convenient bag hooks clearly labeled on both sides
- Easy to read ANSI compliant labels (ANSI Z535.3 and ANSI Z535.4), utilizing universal safety symbols
- Compact, slim profile meets A.D.A. when properly installed. Only protrudes 4 inches or 102 mm from wall.
- Includes universal baby changing station door sign
- Pneumatic gas shock mechanism to ensure smooth, safe open and close motions.
- Includes easy to install, step-by-step instructions plus all mounting hardware
- ASTM G21 Anti-Fungal: No measurable fungal growth
- Meets or exceeds ASTM F2285 Safety Specifications for Commercial Changing Stations.
- Standard pack: 1 unit
- Limited Warranty: This product is warrantied against manufacturing defects for a period of 5 years.

### Short Specifications

Polyethylene Diaper Changing Stations with Stainless Steel Exterior:

1. Acceptable Products: The Sova Company™;  
Model: Vantage (30HS0106 or 30HS0109)
2. Characteristics:
  - a. Entire body 18 gauge, 304 brushed stainless steel, seamless welds
  - b. Provide Sova 01HSF106 (Brushed Stainless) or 01HSF109 (Matte Black) in order to surface mount unit.
3. Equipped with a pneumatic cylinder
4. Smooth nylon belt with Thermoplastic Polyurethane coating. Easy to sanitize and adjustable with one hand.
5. Meets ASTM F2285 requirements for weight bearing changing stations
6. **A.D.A. Compliance:**

|       |                            |
|-------|----------------------------|
| 306.3 | Knee Clearance             |
| 307.2 | Maximum Protruding Objects |
| 308.2 | Forward Reach              |
| 308.3 | Side Reach                 |
| 309.4 | Operation                  |
| 902.3 | Work Surface               |

Compliant when properly installed.
7. ANSI compliant safety labels
8. CPSIA compliant to applicable sections

