



8' PICNIC TABLE ADA CENTER ENTRY WALK THROUGH FRAME






For Part Numbers: 602-756 and
602-757

Physical Details

Weight	Max: 305	Seat Height	20"
Total Boxes	5	Table Width	30"
Dimensions	96 x 64 X 32	Seat Width	12"
Table Height	33"		

Component Details

Item No.	Part Number	Description	QTY
1	613-709	Table Top	1
2	613-710	Table Leg	4
3	613-602B	Seat	4
4	603-206	Brace	2
5	126-703	3/8 x 1" Button Head Bolt	24
6	126-701	3/8 x 1 1/4" Button Head Bolt	5
7	316-601	3/8" Washer	32
8	126-602	3/8" Lock Nut	1
9	516-400	Lock Tite	1
10	416-505BPK	7/32 Long Arm Socket Key	2
		Total Pieces	76

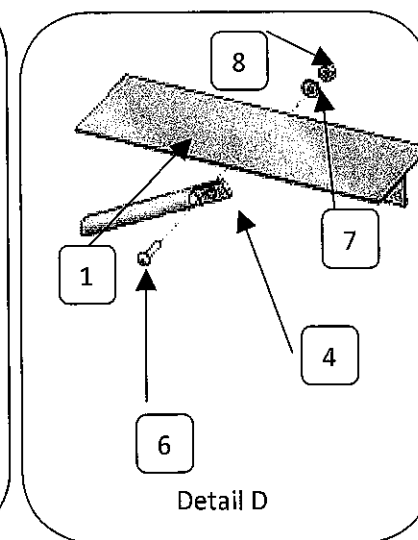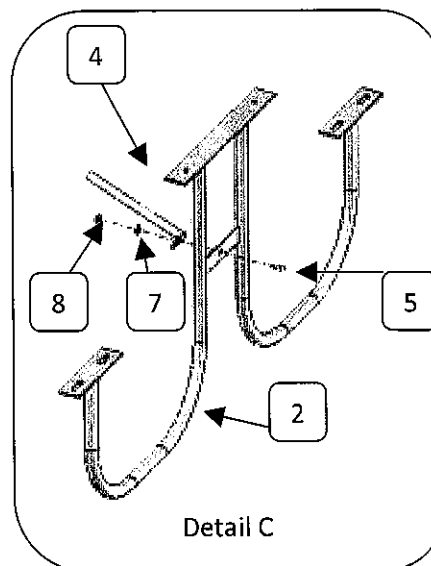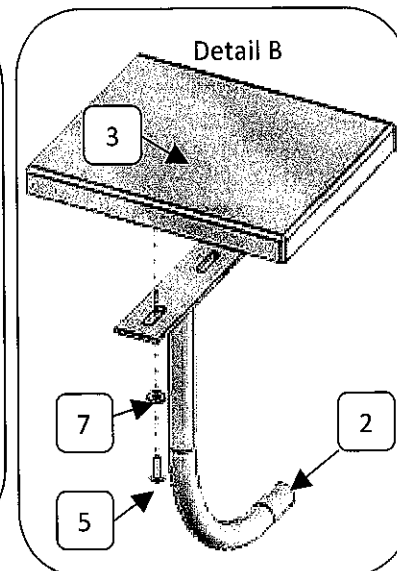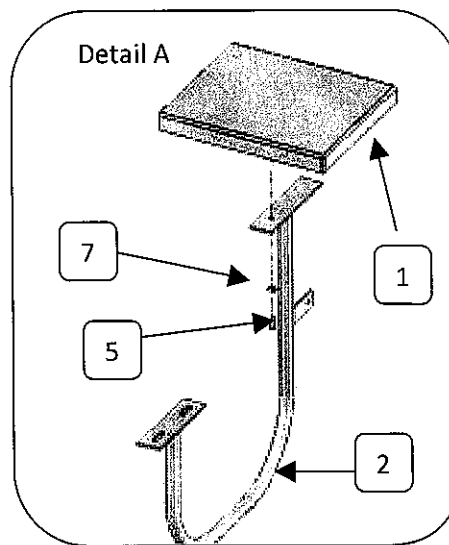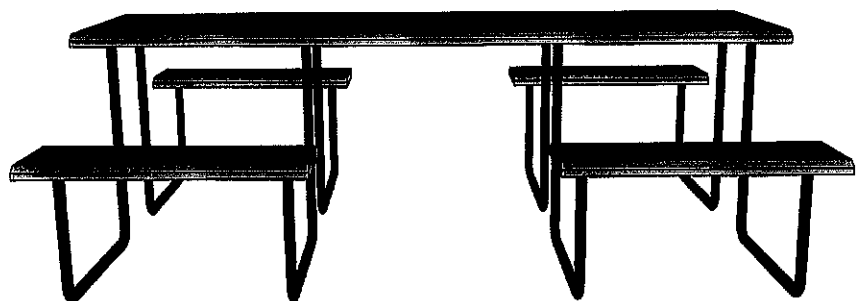



8' PICNIC TABLE ADA CENTER ENTRY WALK THROUGH FRAME

For Part Numbers: 602-756 and
602-757

Important

- Please keep a copy of these instructions in your files. There is important replacement part information in them that will assist you in the event a part is ever needed. Refer to the style and frame index's in order to correctly identify your part numbers should you need to replace them

Assembly Information

- Other than when a specific step in the assembly instructions specifies "to not apply lock tite (8)", we recommend applying a small amount to all assembly bolts.
- Hand-tighten all bolts during the initial assembly (unless specifically told to tighten completely in the instructions). Once the unit is fully assembled and square you should completely tighten them.
- Verify that all parts were received by comparing the parts received to the component list on page one.
- If your product mounts to something (surface mount, in ground or wall mount) you will typically assemble the product before drilling or digging holes in order to ensure proper layout.
- CONTACT YOUR DISTRIBUTOR ABOUT ANY PARTS YOU ARE MISSING. You must report missing parts within 10 days of delivery.

General Maintenance

- It is recommended that you inspect product monthly for loose bolts and broken parts. If replacement parts are needed please refer to these instructions for part numbers and descriptions then call your distributor to order replacements.

Assembly Instructions

1. Attach the Table Top (1) to the Table Legs (2) by inserting 3/8" x 1" Button head bolts (5) and 3/8" washers (7) through the bottom of the mounting plate on the Table Frame and into the factory installed nuts attached to the brackets on the bottom of the table top (Detail A), do not completely tighten the bolts at this time.
2. Using the 3/8" x 1 (5) bolts and 3/8" washers (7) attach the seats (3) to the frame (2) by inserting bolts through the bottom of the mounting plates and the frame and into the factory installed nuts attached to the bracket on the bottom of the seat (Detail B), do not completely tighten bolts at this time.
3. Attach the Braces (4) to bottom side of the Table Top (1) using the 3/8" x 1 1/4" bolt (6), 3/8 washer (7) and 3/8 lock nut (8) to the holes in the center support rib on the bottom of the table top (Detail D). It is not necessary to apply lock tite to these bolts.
4. Next attach the Braces (4) to the tab welded in the center of each Table Leg (2) using the 3/8 x 1 1/4" bolts (5), 3/8" washer through the leg brace and into the round support pipe with nut welded in the end. (8) (Detail C). Repeat this step on the other side. Completely tighten these bolts using the 7/32 Allen wrench provided. It is not necessary to apply lock tite to these bolts.
5. Completely tighten the bolts that attach the Braces (4) to the Table Legs (2).
6. Finally, square the unit in all directions and tighten the seats and table to the frame (Detail's A and B).