Allied

INNOVATIVE DESIGNS
FOR CREATIVE SPACES®

Innovation Maker Table

Assembly Instructions: All Laminate, Dry Erase and Hardwood Tops

Tools Required for Assembly:


- Cordless Screwdriver with #2 Phillips bit
- 3/8” Ratchet with 7/16” or 11mm Socket

Included Hardware:

28 x 3/4” Wood Screws

8 x 3/4” Hex Bolts

8 x Split Washers




Step 1. Leg & Stretcher Assembly:

A) Lay the Table Top upside-down on a clean surface, (such as the flattened packing carton). Place the Leg Assemblies and Stretcher in their rough positions.

Attach the Stretcher to the Leg Assemblies by threading four Hex Bolts with Split Washers finger-tight into the Threaded Inserts. Repeat for the second Leg Assembly.

Do not fully tighten these bolts yet.

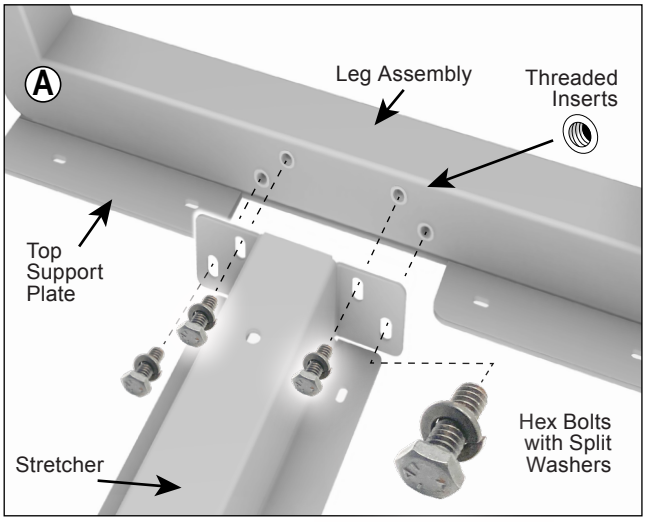

Step 2. Table Top Attachment:

B) Position the Leg Assembly by aligning the slotted holes in the Top Support Plates with the pre-drilled pilot holes in the Table Top. Install 3/4” Wood Screws and tighten until snug. Do not overtighten.

After all screws have been installed, fully tighten the Hex Bolts connecting the Stretcher to the Leg Assemblies. The Split Washer will be fully compressed when the bolt is correctly tightened.

C) Install the four Casters by threading the stem into the square plastic caps on the end of each leg.

With a helper, turn the table upright. The table can be easily rolled into place and secured using the caster locks.

** Optional:*
If you ordered a center support, attach it at location (D) using bolts, washers and screws provided.

