



The ED Table Assembly Instructions

The Original Ed Table
An Innovative Table for the Innovative Mind

IIDA
INTERNATIONAL
INTERIOR DESIGN
ASSOCIATION

EDspaces
INNOVATION
AWARDS

2017 WINNER



KIDS

Our Customers. Our Inspiration.
We should all try to be more like them

Components

What's in the Box!



(1) ONE BUTCHER BLOCK TOP



(1) ONE ED TABLE ASSEMBLY PORTION



(8) EIGHT ¼" 20X35MM BOLTS

(2) TWO WIRE CLAMPS

(2) TWO 6MM SCREWS

(40) FORTY SHELF PINS


TOOLS

What You Will Need!

**Standard #4 Allen Wrench
Electrical Drill w/Phillips Head**

Let's Get Started!

1)

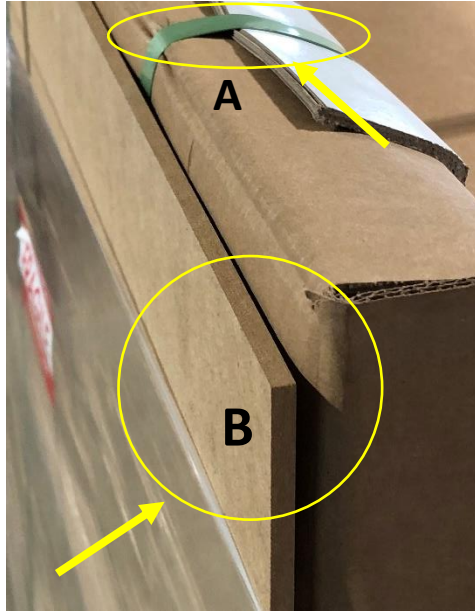

BREAK THE (A) GREEN BAND AROUND THE BOX
AND REMOVE THE PROTECTIVE MATERIAL (B)
FROM THE BUTCHER BLOCK TABLE TOP AND SET
IT TO THE SIDE

2)



AS WITH THE BUTCHER BLOCK TOP, BREAK THE
GREEN BAND AROUND THE BOX AND THEN
REMOVE THE PROTECTIVE MATERIAL FROM THE
TABLE ASSEMBLY




3)

REMOVE THE PROTECTIVE MATERIAL FROM THE BUTCHER BLOCK TABLE TOP AND SET IT TO THE SIDE



4)

LINE UP THE BUTCHER BLOCK TOP WITH THE DESIGNATED TRASH BINS AND ELECTRICAL HOLES SHOWN ON THE LEFT

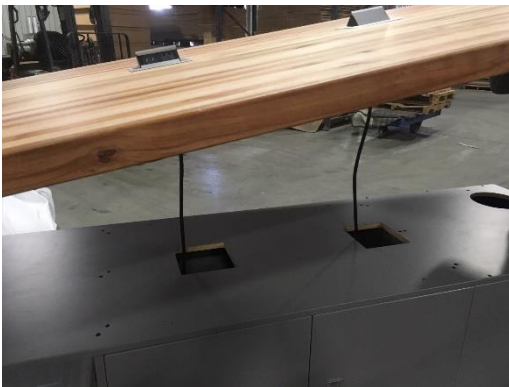

5)

CAREFULLY LIFTING THE BUTCHER BLOCK TOP, FEED THE TWO ELECTRICAL CORDS INTO THE TWO SQUARE SHAPED OPENINGS IN THE TOP OF THE TABLE ASSEMBLY AND SET INTO PLACE



6)

REMOVE THE STORAGE BINS SHOWN TO HAVE ACCESS TO THE SLOTTED HOLES ON THE UNDERSIDE OF THE TABLE ASSEMBLY



7)

LOCATE THE EIGHT (8) SLOTTED HOLES ON THE UNDERSIDE OF THE TABLE ASSEMBLY AND ENSURE THEY LINE UP WITH THE HOLES IN THE BOTTOM OF THE BUTCHER BLOCK TOP

TAKE YOUR

(8) 1/4" 20 BOLTS AND INSERT:

TWO (2) HOLES - ONE IN EACH PLASTIC BIN AREA -

- FOUR (4) HOLES - INSIDE THE CABINET -

- TWO (2) HOLES - IN THE TRASH BIN OPENING



8)

TAKE THE ELECTRICAL WIRE AND RUN IT THROUGH THE ELECTRICAL CUT OUT SHOWN TO THE LEFT



**TAKE ONE WIRE CLAMP AND ONE 6MM SCREW
AND CLIP THE PIECE ON THE ELECTRICAL WIRE**

**USING THE ELECTRICAL DRILL, ATTACH THE
SCREW INSIDE YOUR ED TABLE WHERE YOU FEEL
BEST**



**GRAB THE SHELF PINS LOCATED INSIDE THE
STORAGE BIN AND PLACE THEM IN THE PIN
HOLES AT WHATEVER HEIGHT YOU PREFER**

**PINS WILL POP RIGHT INTO THE DESIGNATED
HOLE**



**AFTER YOU HAVE PLACED YOUR SHELF PINS IN,
TAKE YOUR STORAGE BIN SHELVES AND LINE
THEM UP LIKE SO**

Congratulations!

***You are now ready to enjoy your award-
winning Ed Table for many years to come !***