

DIMENSION SERIES 1-1/8" TABLE TOPS



USACapitol table legs are attached to Capitol table tops using 1/4" x 3/4" serrated locking bolts into flush-installed threaded inserts. These pre-installed inserts provide superior holding power, metal-to-metal contact, correct leg to top placement, ability to disassemble and reassemble quickly, and overall ease of installation and maintenance.

H I G H L I G H T S

- Threaded Metal Attachments
- Advanced Posture Design
- 16 Gauge Legs
- HD Rubber Spray Edge
- Lifetime Frame Warranty
- Fixed and Adjustable Height
- 12-Gauge Leg Plates
- Factory Mounted Stretchers

Dimension™ Table Series Specifications

Leg Insert: 1.115" diameter, 16 gauge cold rolled steel. Nickel/chrome plated tubing with ten punched holes to receive adjusting screw. Leg adjustment uses two self-tapping locking screws which pass completely through both upper leg and lower insert.

Wood Core: 1-1/16" MDF core, medium density. Threaded metal inserts (4-per leg) are factory mounted into the top for receiving leg bolts. Steel tube stretchers are factory attached to all tables 60" or longer.

Laminate Top: Laminate top with Armadillo-Edge™ and three-ply construction. High pressure laminate and backer are 'fused' to the MDF base using a glue web formulation that is clean, environmentally safe, and extremely consistent. Spray edge polyurethane and polyurea formulation is durable, long-lasting, and high-performance. Perfect for protecting from abrasion, corrosion and im-

pect. Designed with the highest chemical equilibrium - softness vs. hardness, toughness vs. longevity, durability vs. impact.

Laminate: Wilsonart®- High-Quality High-Pressure Laminates. Laminate is .030 thick and meets or exceeds LEMA LD3-1980 specifications.

Backer: Wilsonart®- Phenolic backer. Appropriate, .020+ thick, backer sheet is used to balance plies.

Laminate Colors: All tables available in any Wilsonart -38 or -60 laminate.

Cartons: Tops shipped one per carton. Legs shipped separately; one leg set per carton.


Warranty:
● Limited Lifetime Frame Warranty
● Ten Year Warranty

Legs Sets Sold separately See page 27

Dimension™ Table Model Numbers

- 3672HM-SE•36"X 72" Half Moon
- 60HRCL-SE•30"X60" Half Clover
- 30R-SE•30" Round
- 36R-SE•36" Round
- 42R-SE•42" Round
- 48R-SE•48" Round
- 3672K-SE•36"X 72" Kidney
- 4872K-SE•48"X 72" Kidney
- 30SQ-SE•30" Square
- 36SQ-SE•36" Square
- 42SQ-SE•42" Square
- 48SQ-SE•48" Square
- 48CL-SE•48" Clover
- 48HR-SE•48" Half Round
- 60HR-SE•60" Half Round
- 3672HHS-SE•36"X 72" Half Horseshoe Right Side
- 3672HHS-SE•36"X 72" Half Horseshoe Left Side


- 2448T-SE•24"X48" Trapezoid
- 3060T-SE•30"X60" Trapezoid
- 4284T-SE•42"X84" Trapezoid
- 4896T-SE•48"X96" Trapezoid
- 2436-SE•24"X36" Rectangle
- 2448-SE•24"X48" Rectangle
- 2454-SE•24"X54" Rectangle
- 2460-SE•24"X60" Rectangle
- 2472-SE•24"X72" Rectangle
- 3048-SE•30"X48" Rectangle
- 3054-SE•30"X54" Rectangle
- 3060-SE•30"X60" Rectangle
- 3072-SE•30"X72" Rectangle
- 3648•36"X48" Rectangle
- 3660•36"X60" Rectangle
- 3672•36"X72" Rectangle
- 4260•42"X60" Rectangle

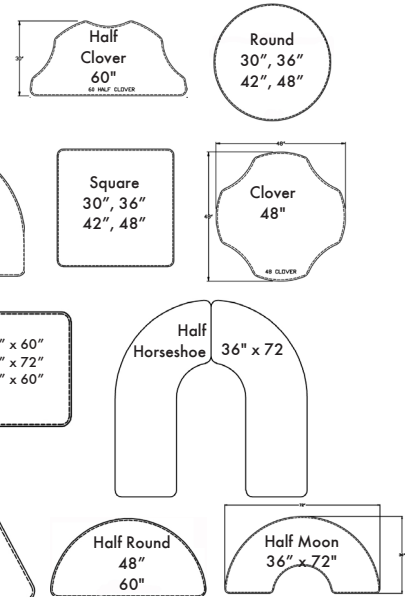


PLEASE NOTE:


Table Top Orders
Meeting Volume Quantities
ALWAYS Have the Option of
Choosing Any WilsonArt Laminate
Ending in -60 or -38
at NO ADDITIONAL UP-CHARGE

STANDARD LAMINATE OPTIONS

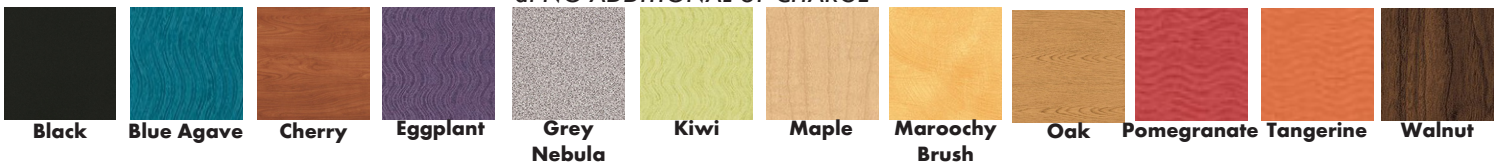

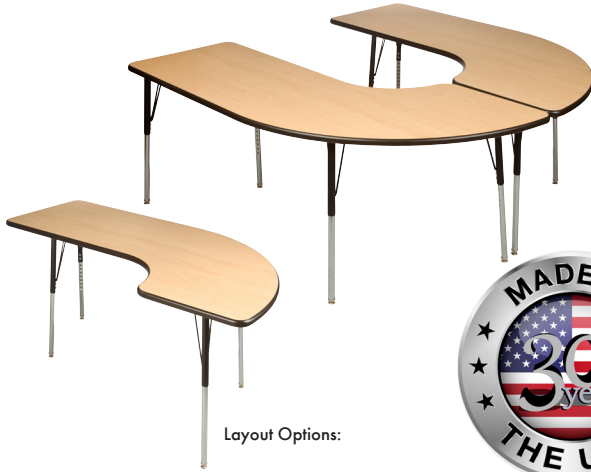

Layout Options:

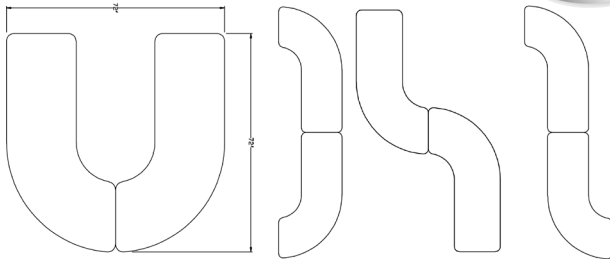

Standard Leg Set Models Sold in Sets of 4:


- 2331SET • Adjusts between 23" - 31"
- 1029SET • 29" Fixed Height LegSet
- 1523SET • Adjusts between 15" - 23"




Adjustable T-Leg Sold Individually:

- OT-Leg • Adjusts between 22" - 31" Specify Caster or Glide when ordering

Book Box and Leg Set Color Options:

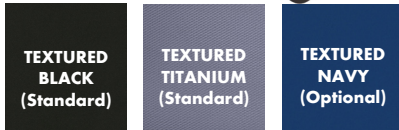

Chrome



Book Box Models:

- 440BX Wire Book Box Option • 18"x12"x5" Wire Box w/Loops



- 400BX Book Box Option • 22"x15"x4.5" Box



- 400BXSM Book Box Option • 15.25"x13.25"x5" Box

Standard Table Leg Set Specifications

Leg Mounting Plate: 12-gauge steel plate, formed with four mounting holes and tumble deburred.

Leg "V" Support: 5/16" diameter type C-1008 cold drawn steel Sigma welded to the leg mounting plate.

Leg Tube: 1-1/4", 16 gauge cold rolled steel swedged to 7/8". Minimum 4-1/2" of total weld. Unit is chrome plated after all welding is complete. Fixed height unit is available in standard chrome.

Leg Insert: 1.115" diameter, 16 gauge cold rolled steel. Nickel/chrome plated tubing with ten punched holes to receive adjusting screw. Leg adjustment uses two self-tapping locking screws which pass completely through both upper leg and lower insert.

Glide System: Glide attachment will be a standard internal gripping spring steel umbrella at least 5/8" diameter or larger. The glide will have a ferrule. Glide casing and ferrule shall be constructed of durable case hardened steel; no plastic. The glide will be of full swivel design, silent and firm fitting for positive attachment and retention. All glides must make full level contact with the floor and the maximum swivel angle of the glide shall not be violated. Incorporating our exclusive glide button system available in either nylon, neoprene, steel, or wool felt bottom. Pick the right base for the floor surface. Snap on a new base for surface change or wear replacement.



Adjustable T-Leg Specifications

Upper: All-tubular design, 16 gauge x .930" x 2.16 flat oval tubing uprights, multiple arc welded into a integral design.

Inserts: 3/4" x 2" diameter, nickel/chrome plated tubing with punched holes to receive eight adjusting screws. Leg adjustment uses self-tapping locking screws which pass completely through both upper leg and lower insert.

Legs: Sold separately from table Tops and individually, not as a set. Available with our exclusive glide system or with soft casters. Legs are sold individually to allow for customization of each table.



Exclusive Glide System

Choose the glide base you need for your floor surface. When glide needs replacement, snap-lock on a new base. Nylon, Steel, Neoprene, Wool Felt





H I G H L I G H T E S

- 4 Options
- 14 Gauge High Strength Steel
- 12 Gauge Steel Mounting Plate
- Soft Wheel Caster Options
- 4 Glide Options
- Lifetime Frame Warranty
- Sleek and Durable
- Fits All Our Tables

Interlox Table System Specifications

Leg Mounting Plate: 12-gauge steel plate, formed with four mounting holes and tumble deburred.

Leg "V" Support: .875 x 1.562 Elongated oval laser cut, 14-gauge Cold Rolled High Strength Low Alloy Steel.

Leg Tube: .875 x 1.562 Elongated oval laser cut, 14-gauge Cold Rolled High Strength Low Alloy Steel. Minimum 24" of total weld. Unit is chrome plated after all welding is complete. Fixed height unit is available in standard chrome.

Glide System: Glide attachment will be a standard internal gripping spring steel umbrella at least 5/8" diameter or larger. The glide will have a ferrule. Glide casing and ferrule shall be constructed of durable case hardened steel; no plastic. The glide will be of full swivel design, silent and firm fitting for positive attachment and retention. All glides must make full level contact with the floor and the maximum swivel angle of the glide shall not be violated. Incorporating our exclusive glide button system available in either nylon, neoprene, steel, or wool felt bottom, pick the right base for the floor surface. Snap on a new base for surface change or wear replacement.

Model Number and Leg Height:

- **OLEG***28.5"
- **OLEGC***28.5"
- **OLEGA***23.5" to 28.5"
- **OLEGAC***23.5" to 28.5"

Here is a list of the Interlox tables and the quantity of legs each requires:

- **OBANNER***4 Legs
- **OBONE***3 Legs
- **OCAP***4 Legs
- **OCASK***4 Legs
- **OCASK-G***None-Pneumatic lift included
- **OCINCH***4 Legs
- **OLOUD***None-Legs included
- **OCURL***4 Legs
- **ODOCK***4 Legs
- **OEBB***4 Legs
- **OFIN***3 Legs
- **OFLAG***4 Legs
- **OFLOW***4 Legs
- **OFOG***4 Legs
- **OHELM***3 Legs
- **OMAST***None-Pneumatic lift included
- **OSCAP***4 Legs
- **OTDSK***4 Legs
- **OTOOTH***4 Legs
- **OTSTA-CAP***None-Pneumatic lift included

T-Shaped Leg Option Picture with Spec on Page 27

rating our exclusive glide button system available in either nylon, neoprene, steel, or wool felt bottom. Pick the right base for the floor surface. Snap on a new base for surface change or wear replacement.

Casters: Standard twin-wheel hooded casters.

Legs: Sold separately from table Tops and individually, not as a set. Available in fixed height and adjustable height. Available with our exclusive glide system or with soft casters. Legs are sold individually to allow for customization of each table. All legs are equipped with backpack/technology hooks.

Exclusive Glide System

Choose the glide base you need for your floor surface. When glide needs replacement, snap-lock on a new base. Nylon, Steel, Neoprene, Wool Felt



Adjustable legs with push button



OLEGAC

OLEGA



OLEG

OLEGC

